

# Model SP elite

# EVS™


Silent Power series

cyclonic bagless



The Power Unit, 'the heart of the ducted cleaning system' is constructed only with Quality Materials and Workmanship, assuring years of trouble free vacuuming.

## Power Unit Features

- ✓ Injected molded from high impact, high temperature ABS polycarbonate and polypropylene plastics,
  - ✓ - provides greater strength and durability.
  - ✓ - will not dent and will last a house time.
  - ✓ - rust and corrosion proof.
  - ✓ - excellent for areas where there is excessive humidity and ideal for coastal areas.
- ✓ Right & Left Entry points for connection of ducting pipe to unit.
- ✓ Cyclonic Filtration System utilising HFPC filter for added motor protection.
- ✓ Also offering Dual Filtration Compatibility; allowing optional Disposable Filter bag to be fitted if required with Bag Conversion Kit.
- ✓ Large capacity dirt receptacle easily emptied by releasing two clamping latches that provide a hermetic vacuum seal between motor base housing and dirt receptacle.
- ✓ Single printed circuit board control module complete with,
  - ✓ - on/off switch for operating inlet point on power unit.
  - ✓ - terminals for extra low voltage remote connections for inlet points inside house.
  - ✓ - IEC type socket and lead for power mains connection.
  - ✓ - dual LED technology status indicators for visual standby and operating modes.
- ✓ Manufactured to meet with all relevant Electrical Safety Standards in Australia and complies with the EMC emission standard AS/NZS 1044. Power units are all marked with the approved marking, , and registration number N1461.
- ✓ Powered by High Efficiency Ametek 2 Stage 145mm Turbine Flow Through Commercial grade vacuum motor with Temperature sensitive overload protection.
- ✓ Acoustic Noise Reduction Insulation lining for Motor Cover Housing.
- ✓ Port discharge of outgoing air allows unit to be fitted with Silencer for extra exhaust noise reduction and allows for venting to outside for 100% filtration.



**electron**  
Est. 1981 Vacuum Systems  
(Aust) Pty Ltd  
www.evsaustr.com.au

CLEANER LIVING



# Model SP elite




# EVS<sup>TM</sup>

## SPECIFICATIONS

Model	SP-elite
<b>Vacuum Motor Specifications</b>	
Tangential By-pass discharge	
Flow Through discharge	•
Double ball bearings	•
Diameter of Motor mm	145
Air Watts	750
Airflow l/s (max.)	61
Sealed Vacuum mm H2O (max.)	3550
RPM @19mm working orifice	26800
Label Rated Electrical Watts	1700
Noise Level dbA with Silencer @ 3m	59.0
Temperature Sensistive Thermal Protector	•
Control Circuit 12 V DC	•
Control Current 100mA	•
Nominal Voltage 240 V AC	•
Nominal Frequency 50 Hertz	•
<b>Power Unit Physical Specifications</b>	
Overall Height (mm)	840
Overall Diameter (mm)	310
Overall Weight (kg)	7.5
Dual Filtration Compatible System	•
Cyclonic Filtration (Standard)	•
HFPC Filter Cartridge	•
Filter Bag Filtration	
Silencer for Exhaust	•
Left & Right ducting entry points	•
Direct Inlet point with On/Off switch	•
Wall Mounting of Power Unit	•
Body Housing Construction	ABS
Dirt Capacity litres	25

Specifications Subject to Change without Notice

145mm Base Turbine  
**2** Fan Stages  
**METEK**  
Quality Motor Inside

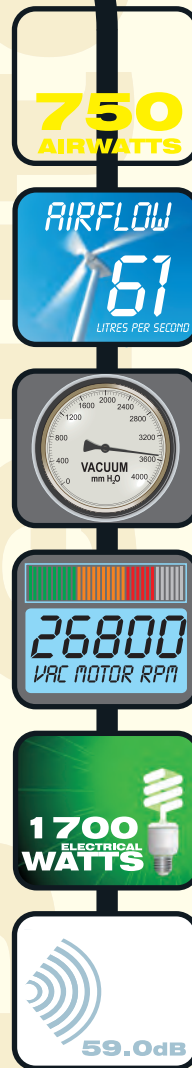

Available from,

**WA ELECTRON**  
**19 HALLEY RD**  
**BALCATT**  
**PH: 93446222**

**electron**  
Est. 1981 Vacuum Systems  
(Aust) Pty Ltd  
www.evsaust.com.au

**CLEANER LIVING**

VER0210VAC2606



E.O.& E. Printed in Australia ©